

## Advantage MF Boost




### Benefits

- Excellent uniformity
- Product consistency
- Optimised resin absorption

### End-uses

- Internal and external building panels
- Worktops
- Flooring
- Shelving

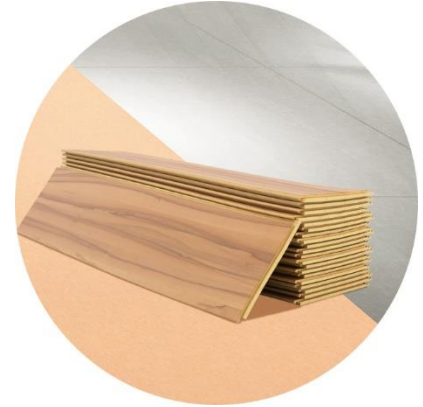

Management Systems / Certifications	
ISO 9001:2015 ISO 14001:2015 ISO 45001:2018 EN 15593:2008	PEFC-CoC FSC-CoC FSC-CW

Technical Values						
Properties		Method		Typical values		
Basis Weight	g/m <sup>2</sup>	ISO 536		80	100	120
Density	kg/m <sup>3</sup>	ISO 534		625	625	625
Tensile strength	kN/m	ISO 1924-3	md cd	8,0 4,0	10,0 5,0	12,0 6,0
Tensile index	Nm/g	ISO 1924-3	md cd	100 50	100 50	100 50
Stretch at break	%	ISO 1924-3	md cd	2,3 5,0	2,3 5,0	2,3 5,0
Wet tensile strength	kN/m	ISO 3781	md	1,2	1,1	1,0
Air resistance	s	ISO 5636-5		12	13	13
Capillary rise klemm	mm	ISO 8787		30	30	30

The table above shows typical values for certain basis weights.  
 The applied testing method standards always refer to the latest version of released version of the standard in reference to the issue date of Technical Data Sheet.

	<b>SPECIALITYWORLD</b> <i>by mondi</i>	Issued from 01.01.2021 latest version available on <a href="http://www.mondigroup.com">www.mondigroup.com</a>	Testing conditions: ISO 187:1990 (23 °C ± 1°C / RH 50% ± 2%)
--	---	---	--